

Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-2010

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid


Cylinder and Valve Assemblies, 10 lb. to 70 lb.
Capacity, Vertical Mount Only Component Sheet

FENWAL®

P/N: 44-10000X0-001

FEATURES

- For use with UL Listed, ULC Listed FM Approvals Systems

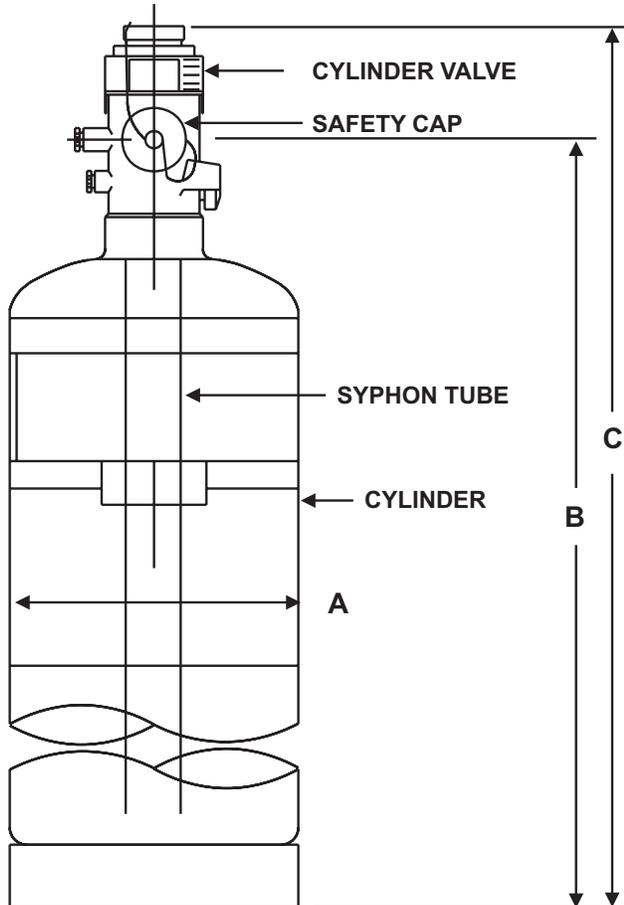

Notes:

1. The safety cap must be installed on the valve outlet at all times, except when the cylinders are connected to the system piping, or being filled. The safety cap must not be removed from its chain.
2. See F-44-2070 for additional information.
3. Cylinders are vertical mount only.

ORDERING INFORMATION

Part Number	Cylinder Size	Dimensions		
		A	B	C
44-100010-001	10 lb.	7.07 in.	13.34 in.	17.30 in.
44-100020-001	20 lb.	7.07 in.	21.01 in.	24.97 in.
44-100040-001	40 lb.	9.00 in.	22.80 in.	26.76 in.
44-100070-001	70 lb.	9.00 in.	34.87 in.	38.83 in.

MATERIALS

- Valve Body: Brass
- Cylinder: Steel, Painted Red

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.



FENWAL®

Protection Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508)881-2000 FAX: (508) 881-8920
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.
If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000