

CO₂ Component Description




Effective: August 2013

K-81-1401 Rev AA

3" and 4" Lock-Out Valve, Stainless Steel (without Limit Switch)

FEATURES

- For Use with UL Listed, ULC Listed and FM Approved Systems
- See Kidde® Manual 220610 for USCG Approval

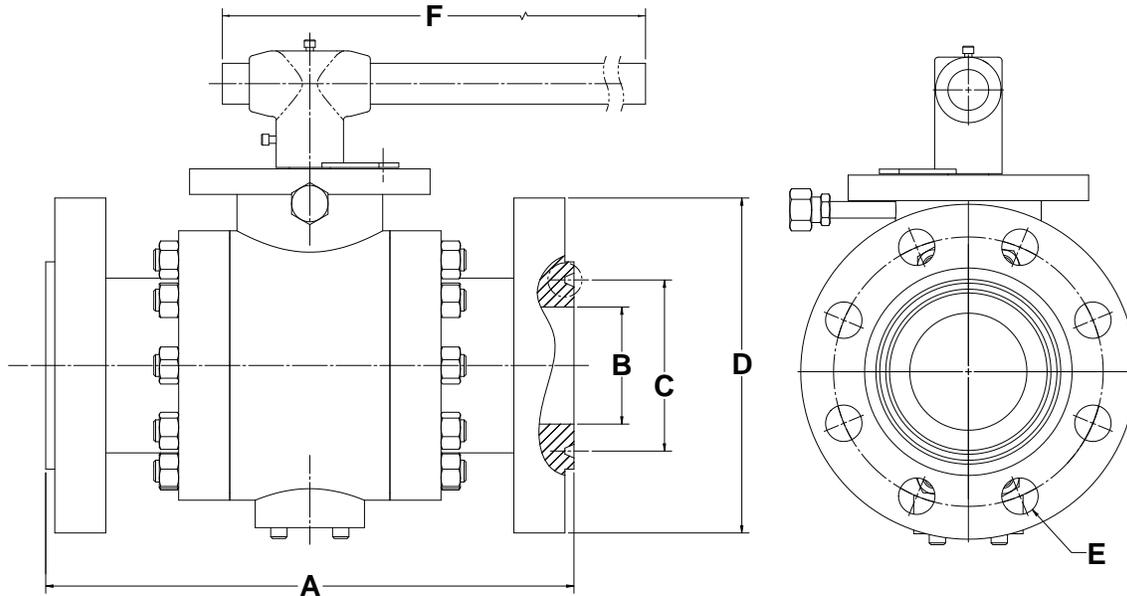

Ordering Information

Valve Size	Part Number	Approximate Dimensions (inches)						Approx. WT (lb)	Valve Style
		A	B	C	D	E	F		
3"	81-934808-000	15.120	3.030	4.875	9.500	1.000	27.600	168	Full Port
4"	81-934809-000	18.120	4.020	5.875	11.500	1.250	35.400	331	Full Port

MATERIALS

- **Body:** Stainless Steel, 316
- **Cap, Body:** Stainless Steel, 316
- **Ball:** Stainless Steel, 316
- **Stem:** Stainless Steel, 51

Working Pressure:

- 2250-psig

End Connection:

- Ring Type Joint (RTJ) Flange, CL900

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Kidde is a registered trademark of Kidde-Fenwal Inc. All other trademarks are the property of their respective owners.