

Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



A UTC Fire & Security Company

Effective: July 2010


K-45-2140

360 Degree Pendant Nozzle Data Sheet

FEATURES

- For Use with UL Listed, ULC Listed and FM Approved Systems

P/N 45-1946XX-XXX

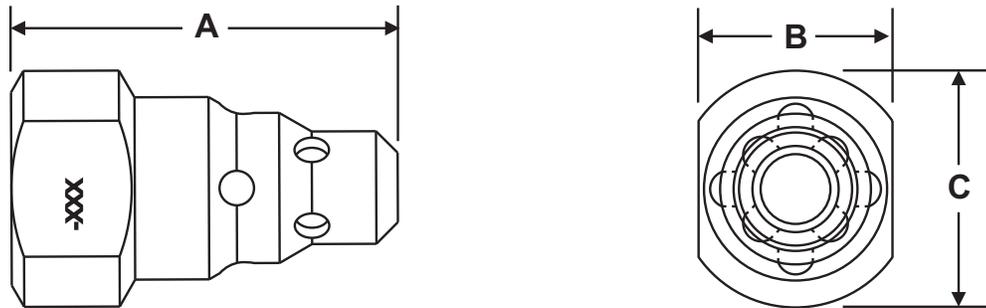

Note: A selection of orifices are available for each nozzle size and make. Consult the Kidde Engineered Fire Suppression System Design, Installation, Operation, and Maintenance Manual for details.

| Pipe Size | Dimension | | |
|-------------------|-------------------|------------------|------------------|
| | A | B | C |
| 1/4 in. (6 mm) | 1.91 in. (49 mm) | 1.03 in. (26 mm) | 0.88 in. (22 mm) |
| 3/8 in. (10 mm) | 2.03 in. (52 mm) | 1 in. (25 mm) | 1.19 in. (30 mm) |
| 1/2 in. (13 mm) | 2.25 in. (57 mm) | 1.13 in. (29 mm) | 1.38 in. (35 mm) |
| 3/4 in. (19 mm) | 2.69 in. (68 mm) | 1.38 in. (35 mm) | 1.63 in. (41 mm) |
| 1 in. (25 mm) | 2.88 in. (73 mm) | 1.63 in. (41 mm) | 1.94 in. (49 mm) |
| 1-1/4 in. (32 mm) | 3.29 in. (83 mm) | 2 in. (51 mm) | 2.38 in. (60 mm) |
| 1-1/2 in. (38 mm) | 3.63 in. (92 mm) | 2.25 in. (57 mm) | 2.69 in. (68 mm) |
| 2 in. (51 mm) | 4.50 in. (114 mm) | 3 in. (76 mm) | 3.50 in. (89 mm) |

Note: Nozzles are offered in either Stainless Steel or Brass.

Kidde is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Kidde Fire Systems
A UTC Fire & Security Company
400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
Fax: 508.881.8920
www.kiddefiresystems.com